


the new PVD coating for  
stainless & steel <52 HRC


# MICRAL 5

APPLICATION	Turning	Milling
Stainless Steel	+++	+++
Steel < 52 HRC	++	+++
Titanium	++	++

## Cutting Volume (cm<sup>3</sup>)

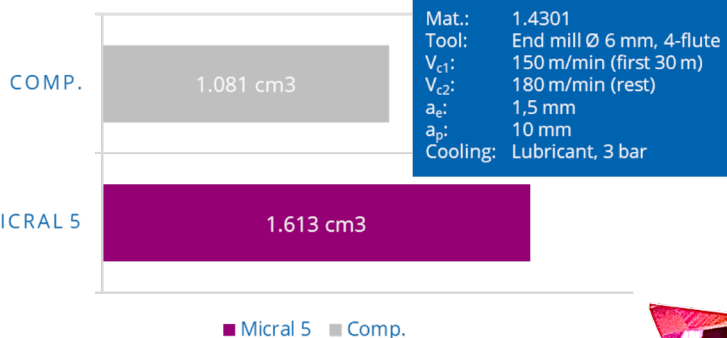

## General data

Structure:	Nanocomposite
Hardness:	3300 HV
Coeff. of friction:	0,5
Max. temperature:	1100 °C
Color:	



Available on:  
MpC 600  
MpC 1000



## ADVANTAGES:

- ✓ Thermally stable
- ✓ Prevents cold welding



**PD2i Europe**  
Willi Bleicher Str.11  
52353 Düren  
Germany  
Tel +49 (0) 2421 692 3000  
info@pd2i.com

**PD2i France**  
86, bd Malesherbes  
75008 Paris  
France  
Tel +33 (0) 153 75 45 05  
info@pd2i.com